


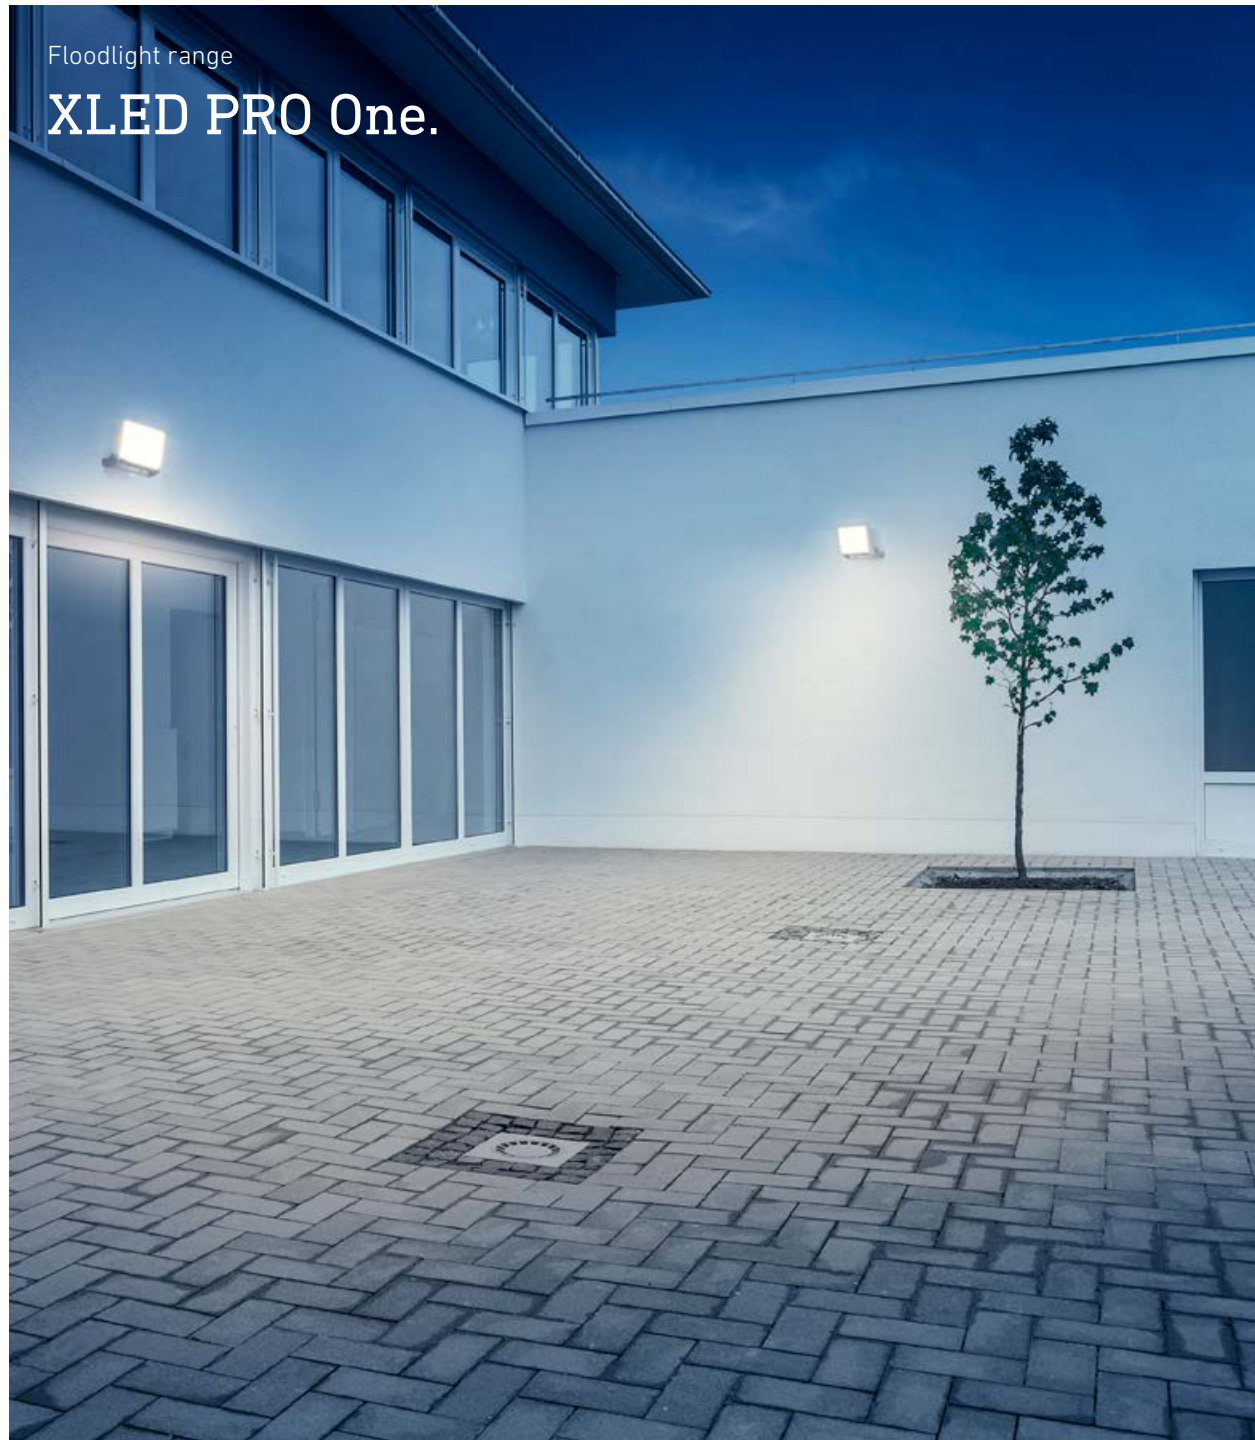
Floodlights redefined

XLED PRO One

The new floodlight range.

 professional line





 <p>Aluminium enclosure</p>	 <p>Panel swivels through 180°</p>	 <p>Incl. RC12 for sensor version</p>	 <p>Optional smart remote</p>	 <p>Optional surface-mounting adapter</p>
--	---	--	---	--

“Bright” isn’t the word.

With a maximum 6116 lumen, the XLED PRO One floodlights ensure perfect illumination with a warm white light, reaching into the furthest corners. The robust aluminium floodlight is available in three levels of luminosity, in a version with or without sensor in each case, all covered by STEINEL’s 5-year manufacturer warranty.

- 10 % basic light
- remote control
- up to 132 lm/W



XLED PRO One sensor versions

		
XLED PRO One S 2204 lm, 120 lm/W 230 x 229 x 182 mm	XLED PRO One Plus S 4370 lm, 129 lm/W 250 x 259 x 202 mm	XLED PRO One Max S 6116 lm, 122 lm/W 250 x 259 x 202 mm

XLED PRO S range	
Max. mounting height	6.00 m
Basic light	10%
Sensor coverage angle	240°, max. 10 m
Interconnection capability	by cable
Enclosure material	aluminium
Cover material	transparent glass
XLED PRO One S	4007841 069568
XLED PRO One Plus S	4007841 069551
XLED PRO One Max S	4007841 069537
Surface-mounting adapter XLED PRO One	4007841 080990
Surface-mounting adapter XLED PRO One Plus/Max	4007841 080983
Smart Remote	4007841 009151

XLED PRO One manual versions

		
XLED PRO One 2236 lm, 126 lm/W 206 x 229 x 182 mm	XLED PRO One Plus 4370 lm, 132 lm/W 226 x 259 x 202 mm	XLED PRO One Max 6116 lm, 122 lm/W 226 x 259 x 202 mm

XLED PRO range	
Max. mounting height	—
Basic light	no
Sensor detection angle	no
Interconnection capability	yes
Enclosure material	aluminium
Cover material	transparent glass
XLED PRO One	4007841 069513
XLED PRO One Plus	4007841 069544
XLED PRO One Max	4007841 069520
Surface-mounting adapter XLED PRO One	4007841 080990
Surface-mounting adapter XLED PRO One Plus/Max	4007841 080983